

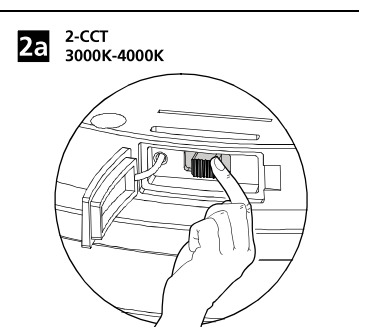
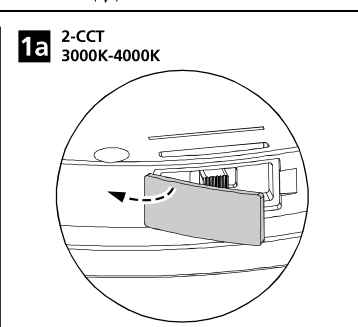
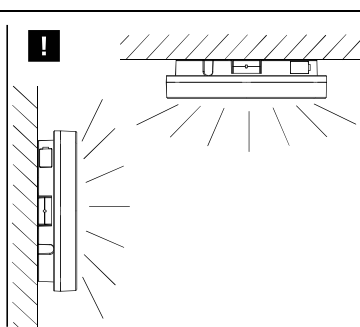
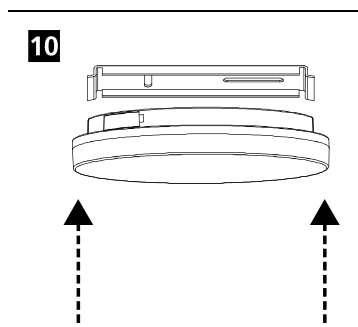
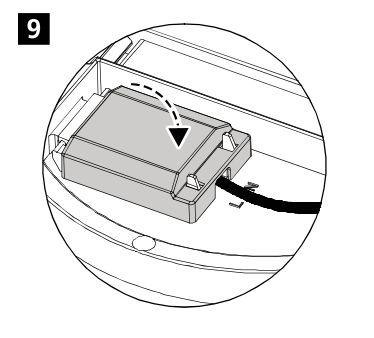
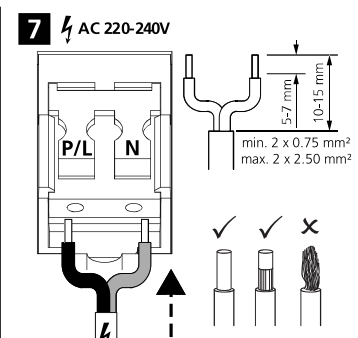
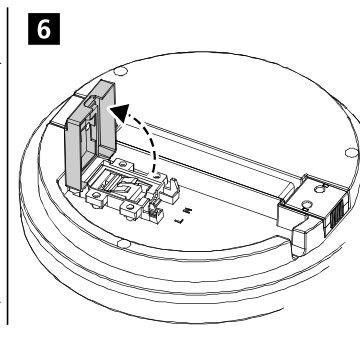
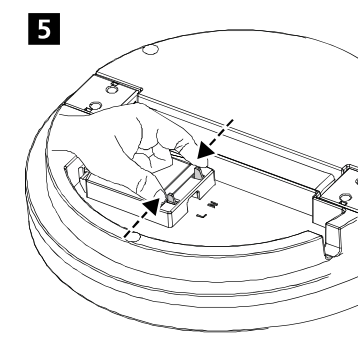
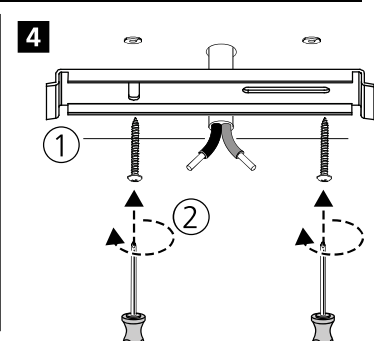
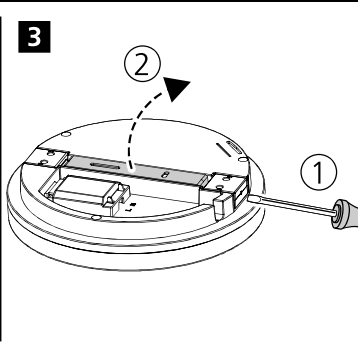
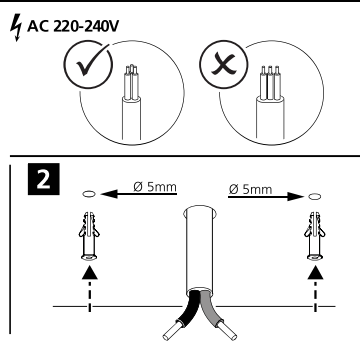
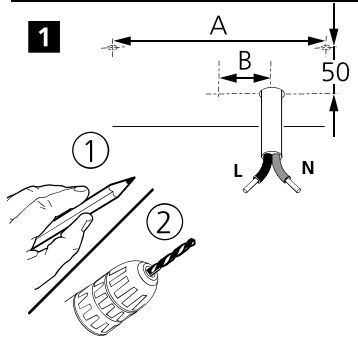



SKU	Ø D	W	H	SKU	A(mm)	B(mm)
0043510	220		53	0043510	35.5-64.5	25-40
0043511	280		53	0043516		
0043512	330		53	0043511		
0043513	400		53	0043514	55.5-84.5	15-40
0043514	280		53	0043517		
0043516		220	53	0043520		
0043517		280	53	0043512	55.5-84.5	0-40
0043518		330	53	0043518		
0043519		400	53	0043513	55.5-84.5	0-40
0043520		280	53	0043519	/145-175	0-40

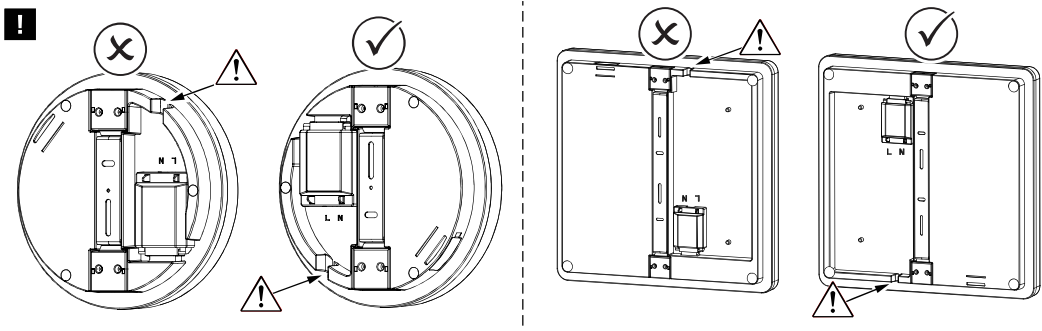


3a 2-CCT
3000K-4000K

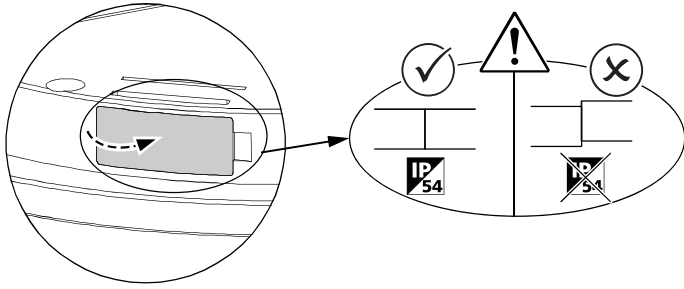

1b MW



2b MW



●: ON
○: OFF

ON
OFF

Default settings:
Stand-by time: 0s
Stand-by dim level: 15%
Daylight: 10lux
Hold-time: 60s
Sensitivity: 100%

	1	2		3	4		5	6		7	8	
I	●	●	0s	●	●	Disable	●	●	30s	●	●	100%
II	○	●	1min	○	●	50Lux	○	●	60s	○	●	75%
III	●	○	10min	●	○	10Lux	●	○	180s	●	○	50%
IV	○	○	+∞	○	○	2Lux	○	○	10min	○	○	10%

Stand-by Period **Daylight Sensor** **Hold time** **Detection area**

3b MW

